

# MP-30 Ticket Dispenser


The **MP-30's** simple, modern device leaves a great first impression for your customer's initial encounter with your PARCS system.

The Entry Terminal is programmable for button or automatic ticket issue. Monthly customers can access the parking facility using a proximity card reader located on the dispenser's front panel. The system supports other customizable technologies upon request.

The interior device for the MP-30 is mounted on sturdy sliding tracks and glides open with just a pull, allowing for ultra-convenient maintenance. The unit can dispense up to 5,000 tickets and new consumables are easily reloaded.

## Features\*


- Heavy duty thermal printer
- Loop detector
- TFT Color hi-res display
- Magnetic card reader for hotel guests, value card payments and credit card users
- Proximity Card Reader
- Stainless Steel housing
- Analog, digital or VOIP intercom
- Data line surge protector and heater
- Custom graphic panels

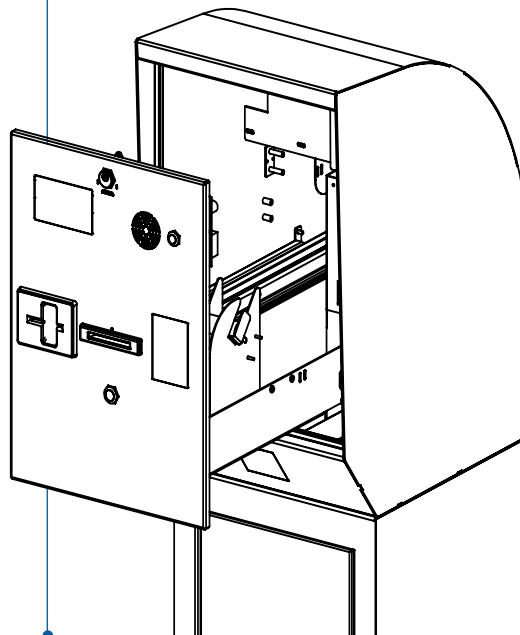

ATLANTA, GEORGIA U.S.A.  
5126 South Royal Atlanta Drive  
Tucker, Georgia 30084  
U.S.A.  
770.491.7586 Phone  
770.934.3384 Fax  
[www.tibaparking.com](http://www.tibaparking.com)

*\* Not all features are available or standard in all regions.  
Check with your local sales person for availability.*

# MP-30 Ticket Dispenser

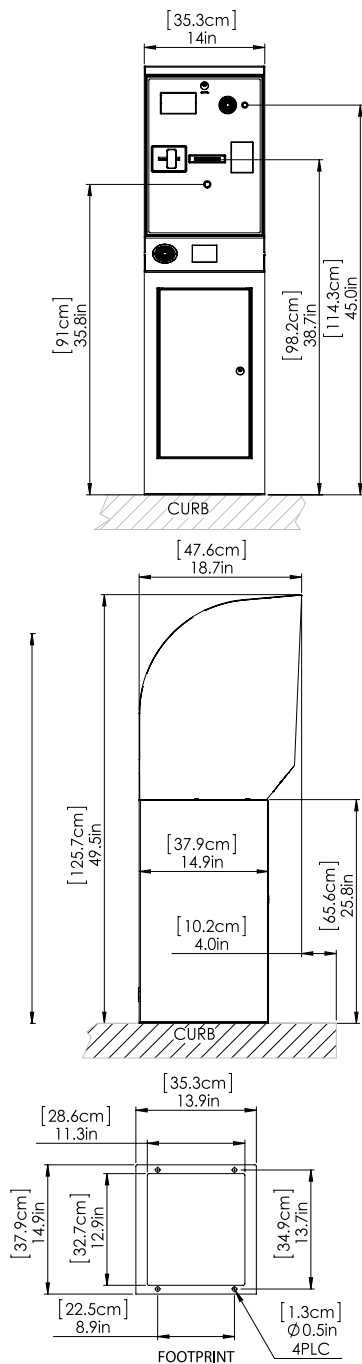

## Features

Ticket issuing	Fast, on-the-fly barcode printing via heavy-duty thermal printer
Monthlies/Employees	Access via proximity card, magnetic stripe cards, AVI, barcode or keypad
Customer display	TFT color hi-res display
Intercom	Analog, digital or VOIP intercom
Data-Line surge protection	Built in
Hotel or value card reader	Supported
Heater	Supported

## Operation

Processor	Embedded industrial controller
Communication & Network	RS-485 industrial communication or TCP/IP ethernet communication
Clock	Built in; backed up by lithium ion battery; keeps clock and data for up to 10 years
Monitoring	Transaction and all events monitored on TMS software in real time
Off-Line Operation	Full off-line mode enabled

## Housing – Stainless Steel

Measurements	14" (35.3 cm) Width; 18.7" (47.6 cm) Depth; 49.5" (125 cm) Height
Weight	127 lbs. (57 kg)
Color (Housing)	Standard: White RAL 9010 Optional: Custom colors available
Locks	Device lock

## Electrical

Voltage	100-240V AC 50-60 HZ
Current	5.3A max. with heater
Power Consumption	650W with heater
Operating Voltage	24V DC

## Environment Conditions

Operating Temperature	-4° to 122° F (-20° to 50° C) with heater
IP Rating	54

## Regulatory



Safety	<ul style="list-style-type: none"> <li>• UL 60950-1:2007</li> <li>• CAN/CSA-C22.2 No. 60950-1-07</li> </ul>
EMC	<ul style="list-style-type: none"> <li>• FCC Part 15, Subpart B, Class B</li> <li>• CE EMC</li> </ul>



*Subject to design and functionality changes until product shipping.*